



Sensor Switch SR-8001A

1. Product Picture

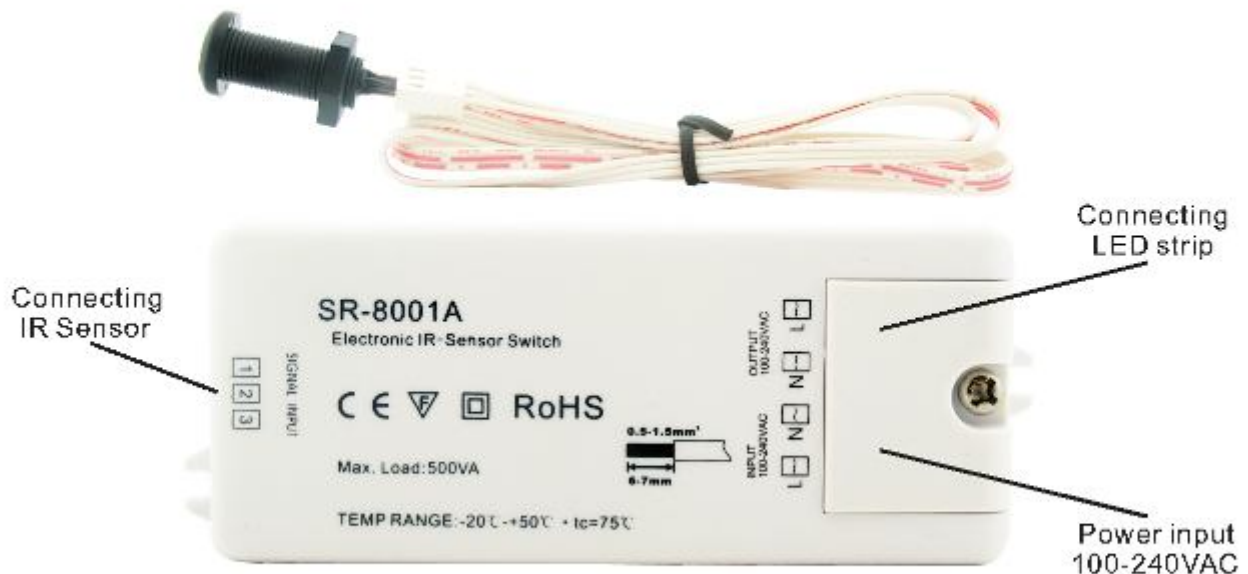

2. Product Size

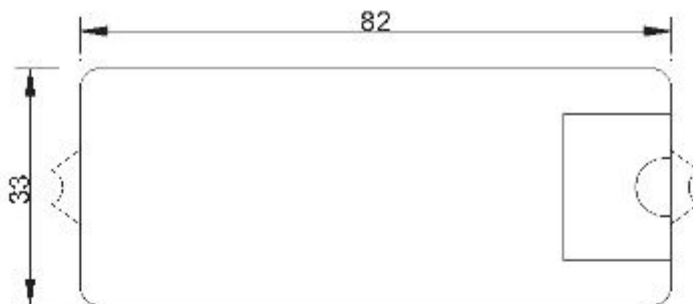

3. Product Parameter

Input Voltage.....	100-240VAC
Max load current.....	5A
Max Output Power.....	500W
Load Type.....	Hv-Halogen Lamps, LED Lamps, Electronic ballast
Ta.....	-20°C ~ +50°C
Tc.....	+75°C
Approval.....	CE/Rohs
Remarks.....	Shake hand to turn on/off

4. Features

- Any reflection within the detection range would cause the change ON. of switch and OFF when a new motion is detected (SR-8001A).
- Any reflection within the detection range would cause the status OFF of switch and no reflection to cause status ON of switch (SR-8001B).
- Detection range: 1-6cm.
- Dia. of Drilling hole: $\Phi 10\text{mm}$.
- Load type: HV Halogen lamps, LED lamps, Electronic ballast.
- Ideal for kitchen, furniture, mirror, etc.
- Two sensor shell can be chosen.

5. Wiring diagram

